



TRELLEBORG



Trelleborg



TM800 Quality at first sight



With its outstanding field and road performance, the TM800 tire has been developed for high power tractors. Excellent traction, superior load capability at high speeds, reduced soil compaction, ride comfort and excellent durability in all working conditions, all enhance the productivity of your farming operations.



**PREMIUM
TRACTION**



**SUPERIOR
FLOTATION**



**REDUCED
FUEL CONSUMPTION**



**EXCELLENT
SELF CLEANING**

Saves you money in the field

The wide contact area with the soil reduces tire slippage and increases traction, which means both energy and time saving.

Moreover the large surface guarantees low soil compaction, improving farm productivity and crop yields. The footprint area of TM800 tire is wider, both at 23 psi and at 9 psi versus a premium brand competitor tire.

Footprint area at 23 psi - Index

Higher is better


+9.2%
wider footprint
vs. a Premium Competitor



Footprint area at 9 psi - Index

Higher is better

+5.6%
wider footprint
vs. a Premium Competitor

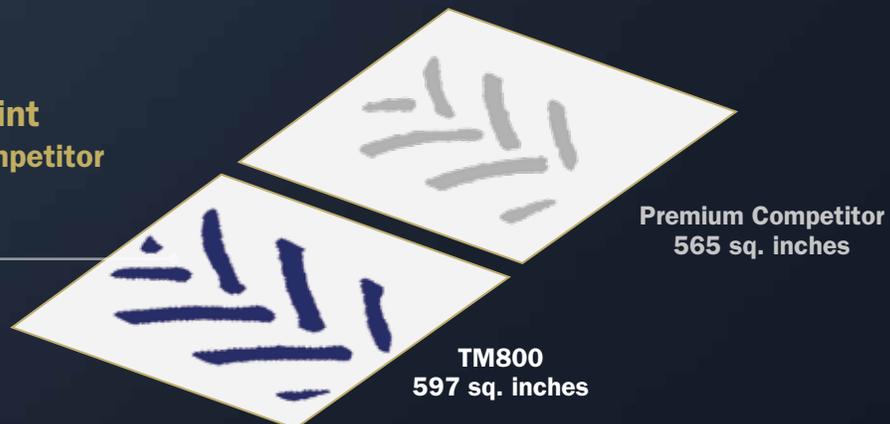

Reference size: 650/65R38
Load capacity: 6,615 lbs

Excellent self-cleaning


The special design of the tread gives the TM800 tire excellent self-cleaning features at any inflation pressure.

As a result, the tires in this range become clean after only one revolution.

The self-cleaning capacity is an added value which brings higher traction capability and assures safety on the road, as well as compliance with regulations.


Feet to run to fill-in completely tread with soil

Higher is better

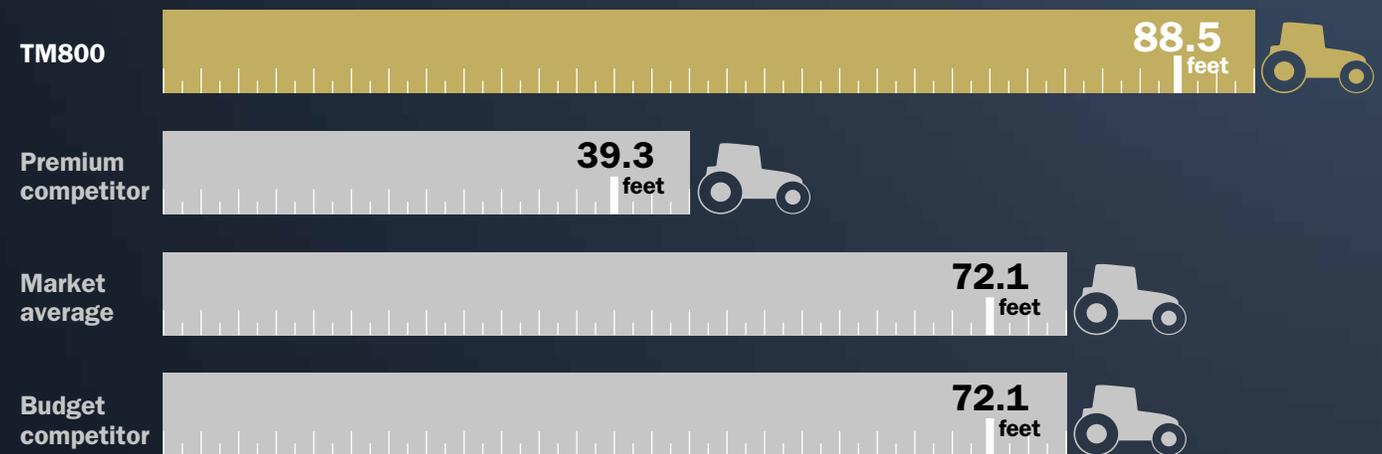

Tire revolutions to unload the tread

Lower is better

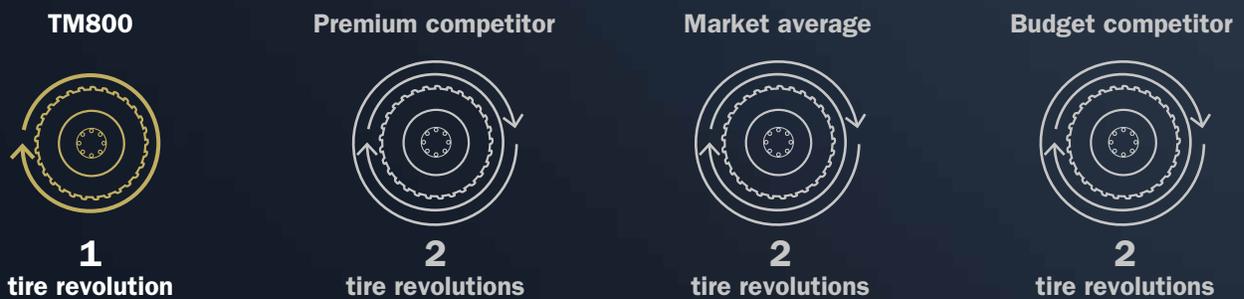

Outstanding self-cleaning in one revolution


Increased productivity, great savings

Plowing tests show that, under the same conditions and using the same sizes, Trelleborg TM800 tires require less working time per acre than main competitors.

Higher farm productivity results in excellent savings in terms of working time, fuel consumption and tractor efficiency.

Time to plow 750 acres

Lower is better

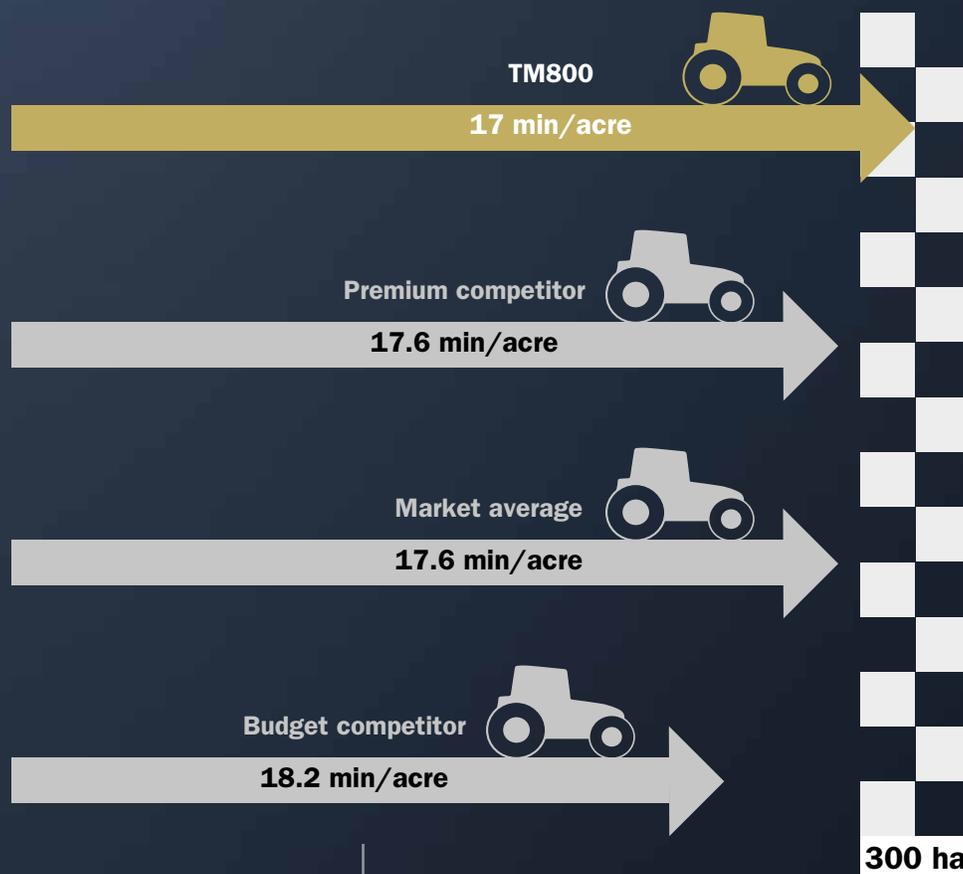

**Up to 8 hours, \$650 saved
vs. the market average**

Reference size: 650/65R38

75% field, 25% road - Soil condition: 40% sand, 35% loam, 25% clay - Humidity: 22%

Constant traction force - Rear axle: single fitment - 2 tires

Average working costs per hour = \$101

Including cost evaluation related to the tire wear performance

A long term profitable investment on the road

All TM800 tires are “D” rated and therefore able to reach 40 mph* on the road. The optimized reinforced casing and the high quality of materials used, ensure excellent vehicle handling and tire performance even at higher speeds. In addition, even in the hardest working conditions, it provides perfect handling of the tractor and better conditions in terms of health and safety for the driver. The quality of the TM800 tire is confirmed by its performance that exceeds the average of the market. It also offers lower fuel consumption compared to other leading brands.

(*) Where authorized by legislation in force in the country.

Fuel consumption on the road - Index

Lower is better



The TM800 uses **8% less fuel and lasts 300 hours more** than the market average

When considering working time, the cost saving offered by the TM800 compared with other producers, reinforces the excellent performance offered by the TM800, even in severe working conditions.

This is why Trelleborg tires represent a long-term profitable investment.



Reference size: 650/65R38

50% road, 50% field - Tractor: 165 hp - Fuel cost = \$4.41/gal - Speed average: 25 mph - Rear axle: single fitment - 2 tires

TM800

Size	Tread Pattern	SW inches	OD inches	SLR inches	RC inches	SRI	Rim	Permitted Rims	Type	Tube
320/65R18 109A8 (109B)	TM800	12.2	34.3		101.8	425	W9	W10 - W10.5 - W11	Tubeless	
340/65R18 113A8 (113B)	TM800	12.6	35.4	15.6	106.1	425	W9	W10 - W10.5 - W11	Tubeless	
440/65R24 128D	TM800	17.4	46.5	21.1	139.6	575	DW14L	W13 - W14L - W15L(°) DW13 - DW15L(°)	Tubeless	14.9-24 TR218
480/65R24 133D	TM800	18.9	48.6	22.2	144.5	600	DW15L	W14L - W15L - W16L(°) DW14L - DW15L - DW16L(°)	Tubeless	16.9-24 TR218
540/65R24 140D	TM800	20.9	51.7	23.4	155.1	625	DW16L	W16L - W15L(°) - W18L DW15L(°)	Tubeless	16.9-24 TR218
540/65R24* 146A8	TM800	21.1	51.7	23.4	155.1	625	DW16L	W16L - W15L(°) - W18L DW15L(°)	Tubeless	16.9-24 TR218
540/65R26 141D	TM800	21.3	53.7	24.2	159.8	650	DW16L	W15L(°) - W16L - W18L DW18L - DW15L(°)	Tubeless	16.9-26 TR218
440/65R28 131D	TM800	17.4	50.5	23	153.7	625	W14L	W13L	Tubeless	16.9-28 TR218
480/65R28 136D	TM800	18.9	52.6	23.8	158.5	650	DW15L	W14L - W15L - W16L(°) DW14L - DW16L(°)	Tubeless	16.9-28 TR218
540/65R28 142D	TM800	20.9	55.6	25.1	166.9	675	DW16L	W15L(°) - W16L - W18L DW15L(°) - DW18L	Tubeless	16.9-28 TR218
600/65R28 147D	TM800	23.2	58.7	26	175.1	700	DW18L	W18L - DW20B	Tubeless	16.9-28 TR218
540/65R30 143D	TM800	20.9	57.6	26.2	173.2	700	DW16L	W15L(°) - W16L - W18L DW15L(°) - DW18L	Tubeless	18.4-30 TR218
540/65R34 145D	TM800	20.9	61.7	28	185.4	750	DW16L	W15L(°) - W16L - W18L DW15L(°) - DW18L	Tubeless	16.9-34 TR218
600/65R34 151D	TM800	23.6	64.7	29.1	193.7	775	DW20B	DW18L - W18L	Tubeless	
540/65R38 147D	TM800	20.9	65.6	29.9	197.2	800	DW16L	W15L(°) - W16L - W18L DW15L(°) - DW18L	Tubeless	18.4-38 TR218
600/65R38 153D	TM800	23.2	68.7	30.9	205.1	825	DW18L	W18L - DW20B	Tubeless	20.8-38 TR218
650/65R38 157D	TM800	25.4	71.3	32.1	212.4	875	DW20L	W18L(°) - DW18L(°)	Tubeless	20.8-38 TR218
710/70R38 166D	TM800	28.2	77.1	34.8	227	925	DW23B		Tubeless	
710/70R38 166D	TM800 Sugar Cane	28.2	77.1	34.8	227	925	DW23B		Tubeless	
710/70R38 171D	TM800 Sugar Cane	27.9	76.4	34.8	228.5	925	DW23B		Tubeless	
710/70R38 175D	TM800 Forage	28.1	77.2	34.8		925	DW23B		Tubeless	
600/65R42 154D	TM800	23.2	72.7	32.7	219.7	875	DW18L	W18L - DW20B	Tubeless	20.8-42 TR218
650/65R42 158D	TM800	25.4	75.3	33.9	227.6	925	DW20B	W18L(°) - DW18L(°)	Tubeless	20.8-42 TR218
650/65R42 165D (168A8)	TM800	25.4	75.9		228.9	925	DW20B	DW18L	Tubeless	20.8-42 TR218

TM800 ProgressiveTraction®

Size	Tread Pattern	SW inches	OD inches	SLR inches	RC inches	SRI	Rim	Permitted Rims	Type	Tube
540/65R28 142D	TM800 ProgressiveTraction®	20.7	56.1	24.8	166.9	675	DW16L	W15L(°) - W16L - W18L DW15L(°) - DW18L	Tubeless	16.9-28 TR218
650/65R38 157D	TM800 ProgressiveTraction®	25.6	71.7	31.9	212.4	875	DW20B	W18L(°) - DW18L(°)	Tubeless	20.8-38 TR218

TM800 HS

Size	Tread Pattern	SW inches	OD inches	SLR inches	RC inches	SRI	Rim	Permitted Rims	Type	Tube
540/65R28 149D (146E)	TM800 HS	20.9	55.6	25.1	166.1	675	DW16L	W15L(°) - W16L - W18L DW15L(°) - DW18L	Tubeless	16.9-28 TR218
600/65R28 154D (151E)	TM800 HS	23.2	58.7	26	176.8	700	DW18L	W18L - DW20B	Tubeless	16.9-28 TR218
540/65R30 150D (147E)	TM800 HS	20.9	57.6	26.2	175	700	DW16L	W15L(°) - W16L - W18L DW15L(°) - DW18L	Tubeless	18.4-30 TR218
540/65R34 152D (149E)	TM800 HS	20.9	61.7	28	185.4	750	DW16L	W15L(°) - W16L - W18L DW15L(°) - DW18L	Tubeless	16.9-34 TR218
600/65R34 157D (154E)	TM800 HS	23.6	65.4	29.3	195.5	775	DW20B	DW18L - W18L	Tubeless	
540/65R38 153D (150E)	TM800 HS	20.3	67.3	29.9	204	800	DW16L	W15L(°) - W16L - W18L DW15L(°) - DW18L	Tubeless	18.4-38 TR218
650/65R38 163D (159E)	TM800 HS	25.4	71.3	32.1	214.6	875	DW20B	W18L(°) - DW18L(°)	Tubeless	20.8-38 TR218
650/65R38 166D (169A8)	TM800 HS	25.9	71.6	32.4	215.7	875	DW20B		Tubeless	20.8-38 TR218
710/70R38 171D (168E)	TM800 HS	28	77.7	34.8	233.4	925	DW23B		Tubeless	

(°) = For these rims please contact the Trelleborg expert in your area
 (*) = For harvesting applications



Discover our website

Follow us



Yokohama TWS North America, Inc.
107 Audubon Road – Building 2 – Suite 205 – Wakefield, MA 01880
866-633-8473 – info.twsa@yokohama-tws.com
www.trelleborg-tires.com/en-us